

CUSTOMIZED LEADING MANUFACTURER SINCE 1997

Criterion & Certification

Quality Warranties

VOXFLO provides quality warranties at least 10-15 year period for nylon products.

10-15 year Wear Resistance Limited Warranty

10-15 year Delamination Limited Warranty

10-15 year Dimensional Stability Limited Warranty

CRI Green Label Plus Certificate GLP 6331#

CRI Green Label Plus Certificate GLP 6332#

CRI Green Label Plus Certificate GLP 1266#

Certification System

ISO 9001:2008

ISO 14001:2004

OHSAS 18001:2007

Performance Certificates in China

Flammability: GB 8624-2012 B1-C Class

Carpet Quality & Performance: QB/T 2755-2005

Environment Protection: GB 18587-2001

Anti-static: GB/T 18044-2008

Certified Environment-Friendly Carpet of China



Product Green Label:

Health Product Declaration

Declare

Declare Label



Performance Certificates in USA:

Flammability : ASTM E648 Radiant Panel

ASTM E662 Smoke Density

Anti-Static : AATCC 134 Anti-static

Color Fastness: AATCC 165 Crocking

AATCC 166 Colorfastness to Light

Carpet Quality & Performance : ASTM D1335 Tuft Bind

Dimensional Stability : AACHEN

Abrasive Resistance : ASTM D5252 Hexapod Drum

Stain Resistance : ASTM D6540 Anti-soiling

AATCC 175 Stain Resistance

Anti-Bacteria, Fungi & Mites : AATCC 174 Anti-bacteria Test

Delamination Strength : ASTM D3936

Performance Certificates in Europe:

CE Certificate / Flammability: EN ISO 9239-1 & EN ISO 11925-2, BS 4790: Hot Metal Nut

Acoustic certificate : EN ISO 140-3 Impact Sound Transmission

EN ISO 154 Sound Absorption Coefficient

BS EN 985 Castor Chair


OUR NEW PRODUCT



MUNDI


VOXFLO®

dalton
Indonesia®



THE PAST
CANNOT
BE CHANGED

FOSSIL

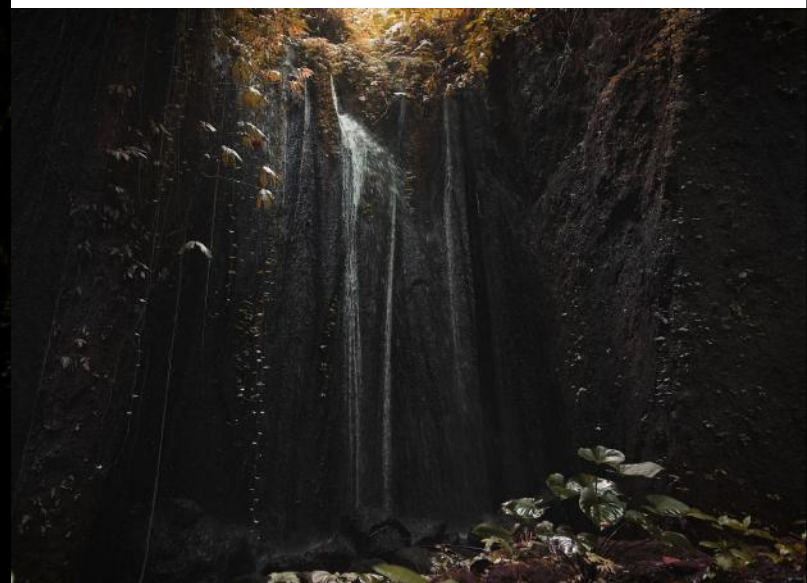


MUNDI




MUNDI



MUNDI

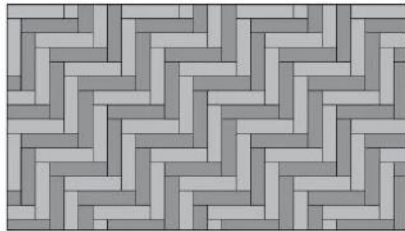


Fossil 50244 Misty 40244

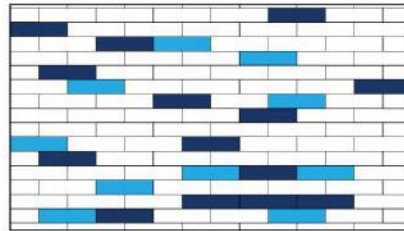


Baseo 40000 Misty 42131 Moss 2131




Misty 405507 Baseo 40000

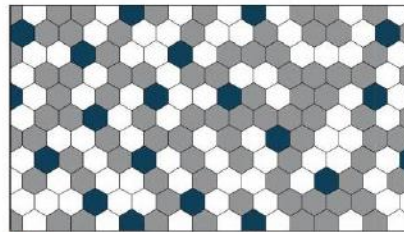


Moss 7112 Misty 27112 Misty 03190

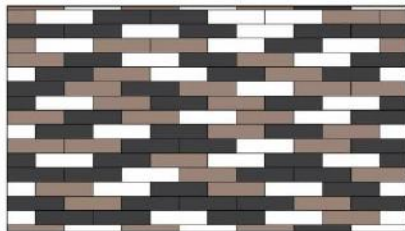


Baseo 20000 Misty 205507 Misty 505507

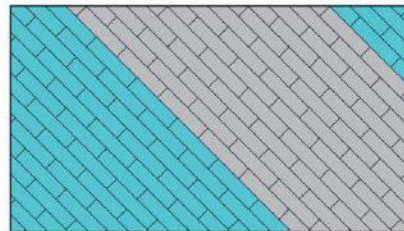


Misty 83193 Moss 3193

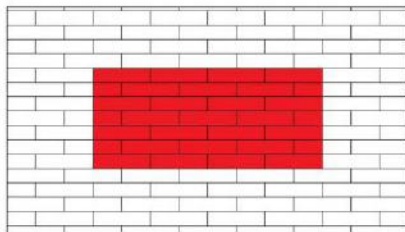

Moss 5456 Misty 55456

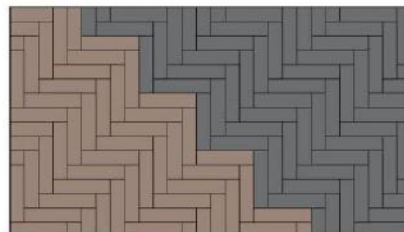

Misty 505507 Moss 05507

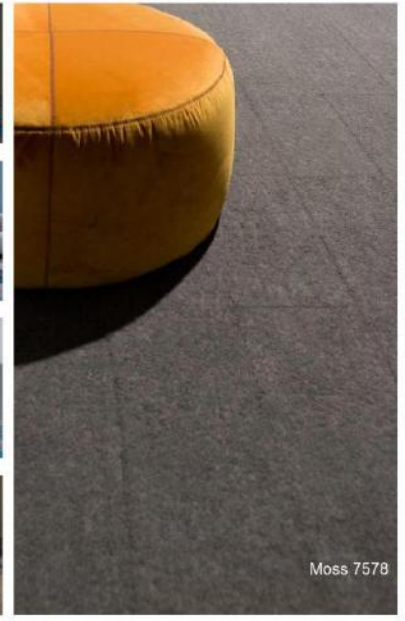

Moss 7578

Colors



Moss 9897



Moss 10098



Moss 7578



Moss 1675



Moss 2359



Moss 5456



Moss 7112



Moss 3193




Moss 0905



Moss 05507

MUNDI

Colors

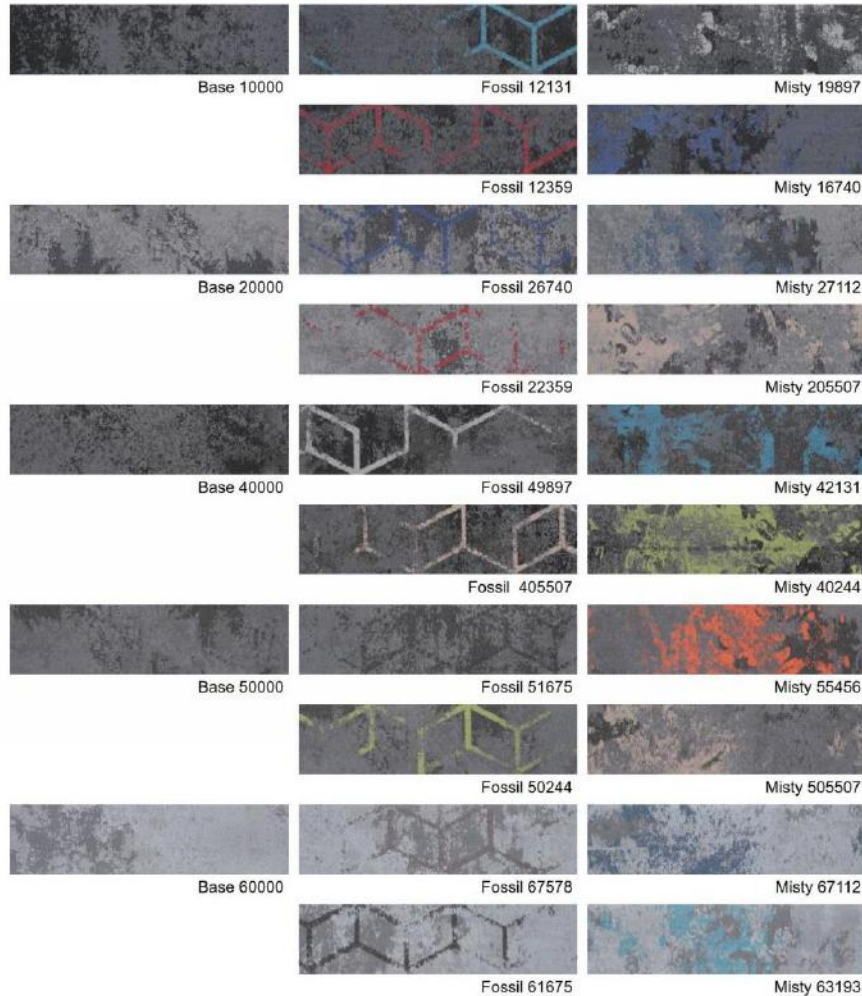

Specifications

| | | |
|----------------------|--|--|
| Style Name: | Moss | Base |
| Construction: | Multi-level Loop | Multi-level Loop & Tip Shear |
| Fiber: | Antron® Legacy Nylon 66 | Voxflor Certified Nylon |
| Gauge: | 1/10" | 1/10" |
| Stitches: | 9 per inch | 9 per inch |
| Pile Weight: | 32 OZ/yd ² | 26 OZ/yd ² |
| Average Pile Height: | 5.0mm±0.5mm | 5.0mm±0.5mm |
| Backing: | PVC with fiberglass | PVC with fiberglass |
| Tile size: | 25cm*100cm | 25cm*100cm |
| Area of Use: | Commercial - General Duty | Commercial - General Duty |
| Anti-microbial: | Health Guard (Available) | Health Guard (Available) |
| Flammability: | ASTM E 648 Class I, GB8624-2012 B1(C) | ASTM E 648 Class I, GB8624-2012 B1(C) |
| Smoke Density: | ASTM E 662 Less than 450, GB/T 8627-1999 | ASTM E 662 Less than 450, GB/T 8627-1999 |
| Static Propensity: | AATCC-134 ≤3.5kV, GB/T 18044-2008 | AATCC-134 ≤3.5kV, GB/T 18044-2008 |



| | |
|----------------------|---|
| Style Name: | Fossil/Misty |
| Construction: | Multi-level Loop & Tip Shear |
| Fiber: | Voxflor Certified Nylon + Antron® Legacy Nylon 66 |
| Gauge: | 1/10" |
| Stitches: | 9 per inch |
| Pile Weight: | 30 OZ/yd ² |
| Average Pile Height: | 5.0mm±0.5mm |
| Backing: | PVC with fiberglass |
| Tile size: | 25cm*100cm |
| Area of Use: | Commercial - General Duty |
| Anti-microbial: | Health Guard (Available) |
| Flammability: | ASTM E 648 Class I, GB8624-2012 B1(C) |
| Smoke Density: | ASTM E 662 Less than 450, GB/T 8627-1999 |
| Static Propensity: | AATCC-134 ≤3.5kV, GB/T 18044-2008 |



Fossil/Misty Code
Fossil 405507
Moss Color
Base Color
Pattern Name




Declare.


GROOVE



VOXFLO[®]

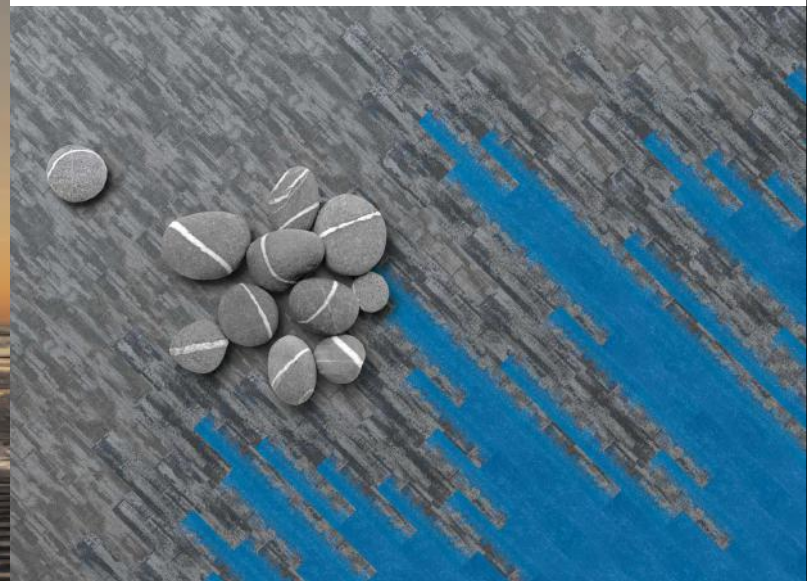

GROOVE

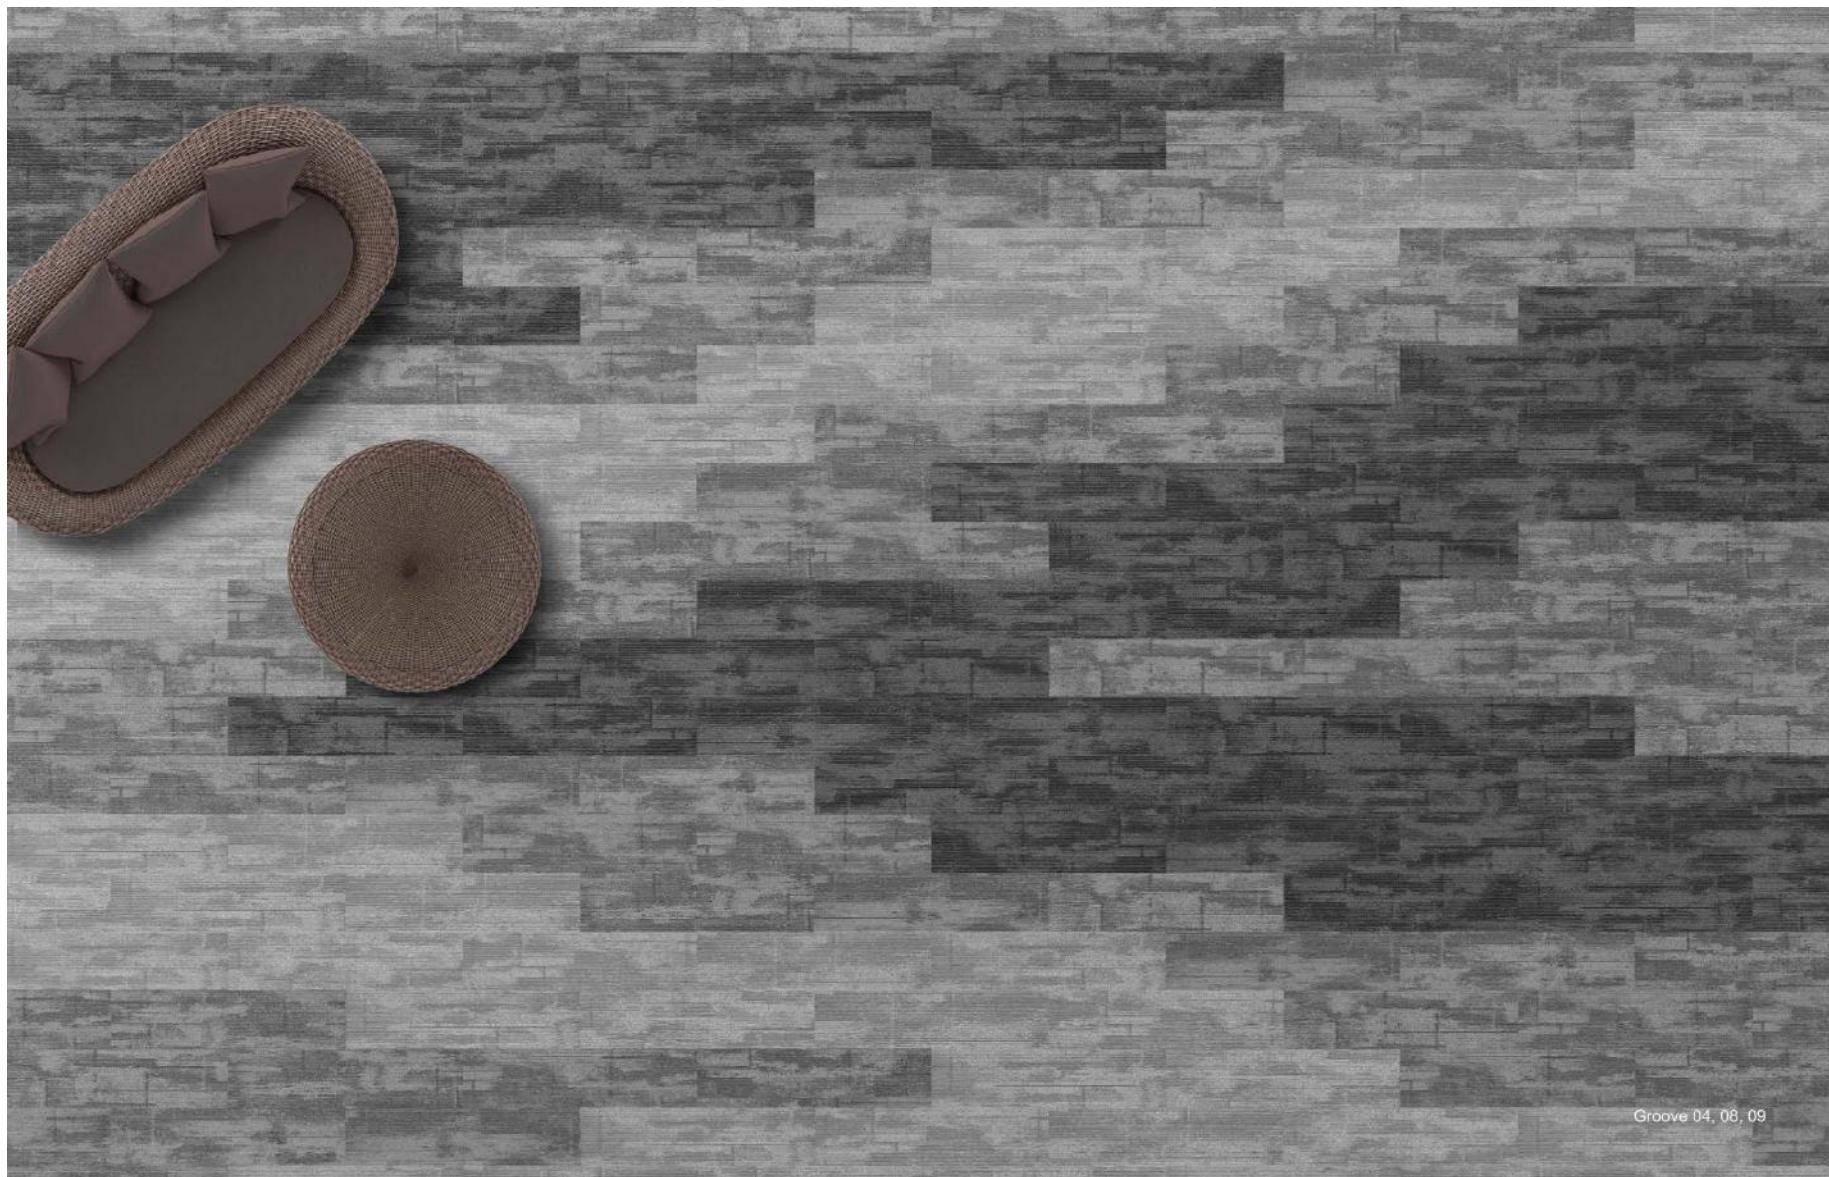


GROOVE




Groove 08
Bark 10000


GROOVE

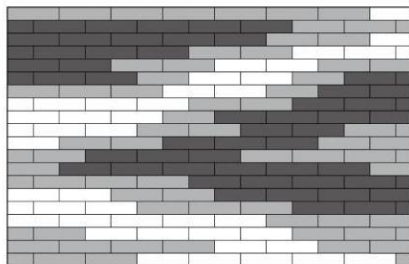

 Groove 09
 Groove 04
 Groove 08

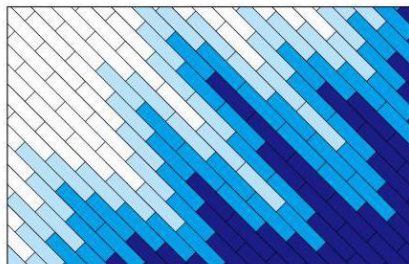

 Groove 04
 Bark Plus 27352
 Bark Edge 27352
 Moss 7352

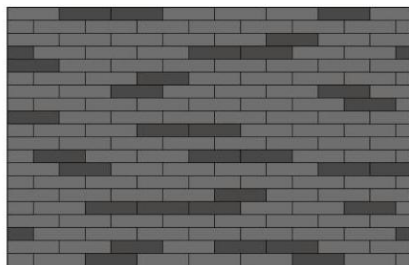

Groove:Bark=2:8
 Groove 08
 Bark 10000

Recommended Combination



Groove 09



Bark 30000



Groove 04



Bark 20000




Groove 08



Bark 10000

Colors

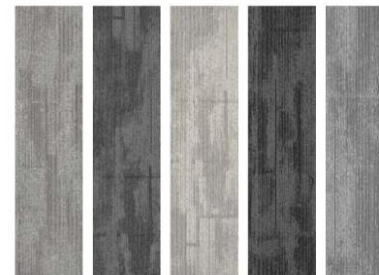

02 04 07 08 09

Specifications

| | |
|----------------------|--|
| Style Name: | Groove |
| Construction: | Tufted Cut and Loop |
| Fiber: | Voxflor Certified Nylon |
| Gauge: | 1/10" |
| Stitches: | 10 per inch |
| Average Pile Height: | 4mm±0.5mm |
| Pile Weight: | 26 OZ/yd ² |
| Backing: | PVC with Fiberglass |
| Tile size: | 25cm*100cm |
| Area of Use: | Commercial - General Duty |
| Anti-microbial: | Health Guard (Available) |
| Flammability: | ASTM E 648 Class I, GB8624-2012 B1(C) |
| Smoke Density: | ASTM E 662 Less than 450, GB/T 8627-1999 |
| Static Propensity: | AATCC-134 ≤3.5kV, GB/T 18044-2008 |



Ashlar



Herringbone



Declare.

INTERWEAVE

VOXFLOR

INTERWEAVE




Interweave 02, 03, 08, 10 & Moss 8561





INTERWEAVE

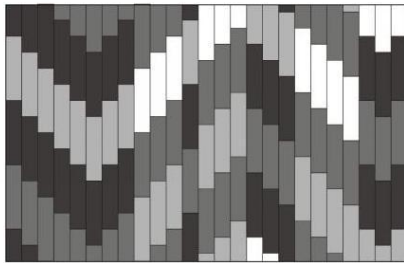

INTERWEAVE




Turned Twill

-  Interweave 03
-  Interweave 06
-  Interweave 08
-  Interweave 09



Woven

-  Interweave 02
-  Interweave 03
-  Interweave 06

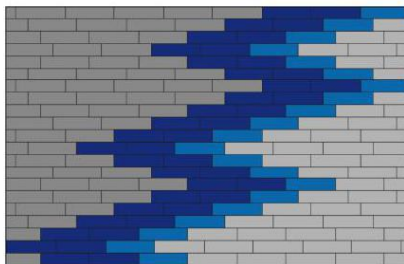

Zig Zag


-  Interweave 06
-  Interweave 01
-  Moss 2131
-  Moss 7352



Missoni


-  Interweave 02
-  Interweave 03
-  Interweave 08
-  Interweave 10
-  Moss 8561

Colors

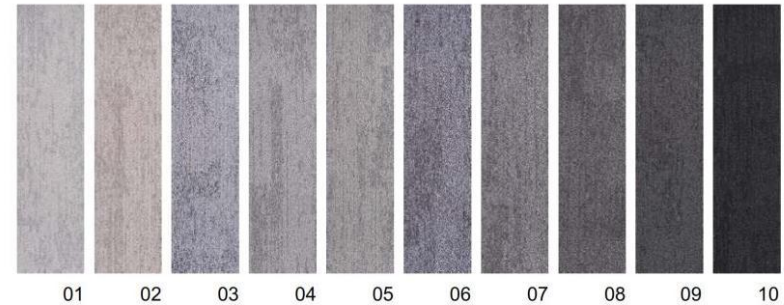



Specifications

| | |
|----------------------|--|
| Style Name: | Interweave |
| Construction: | Multi-level Loop |
| Fiber: | Voxflor Certified Nylon |
| Gauge: | 1/12" |
| Stitches: | 10 per inch |
| Average Pile Height: | 4mm±0.5mm |
| Pile Weight: | 25 OZ/yd ² |
| Backing: | PVC with Fiberglass |
| Tile size: | 25cm*100cm |
| Area of Use: | Commercial - General Duty |
| Anti-microbial: | Health Guard (Available) |
| Flammability: | ASTM E 648 Class I, GB8624-2012 B1(C) |
| Smoke Density: | ASTM E 662 Less than 450, GB/T 8627-1999 |
| Static Propensity: | AATCC-134 ≤3.5kV, GB/T 18044-2008 |



HUB COLLECTION

VOXFLO[®]

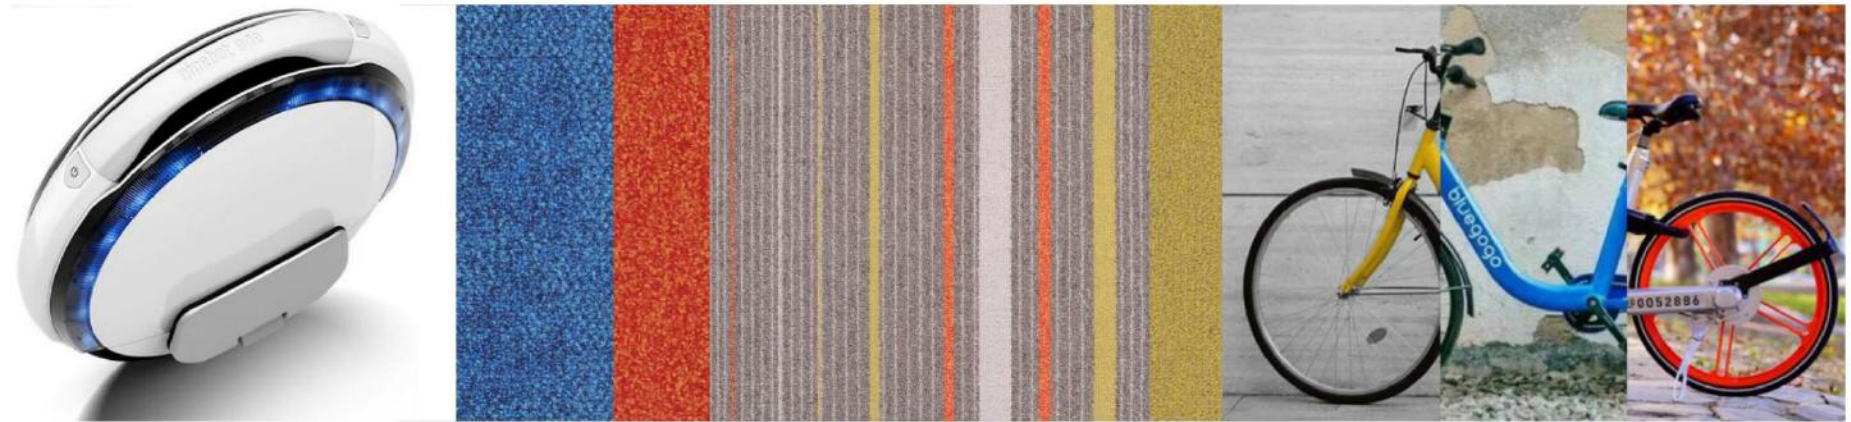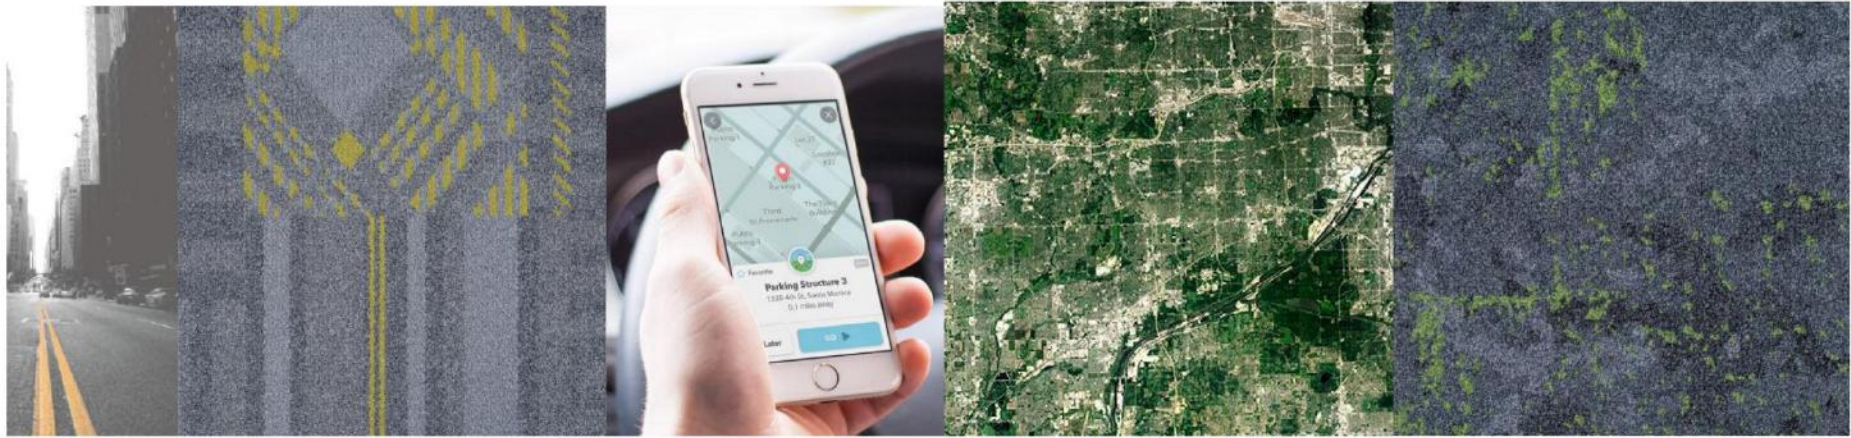

Hub is the result of a journey and the beginning of another one ...

RE-COMMERCIALIZATION

WORLDWIDE NYLON 6
WASTE RESCUE



TRANSFORMATION
INTO NYLON 6 YARN

ECONYL®
DEPOLYMERIZATION PLANT

HUB COLLECTION fully uses ECONYL® 100% regenerable and regenerated fiber, made from Nylon 6 waste materials such as spent carpets, fishing nets, production discards and other waste.

In the ECONYL® process, The story of the ECONYL® yarn is a story where waste is not the end, but the beginning.


In HUB COLLECTION, start its own new mission.

Development Background




This became a source of inspiration for HUB COLLECTION:
HUB COLLECTION is a sketch of urban life, unifying and combining different taste. It has 5 patterns, a variety of options to present the city with different eyes.

Make the ground produce a different style. We also can be combined together to let the whole ground is more stylish, plump and full of vitality.

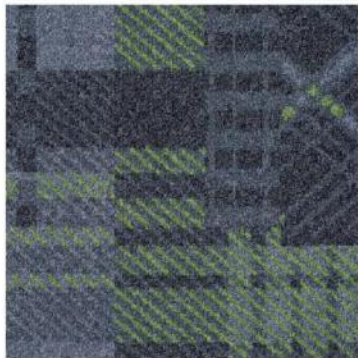


Rush Hour

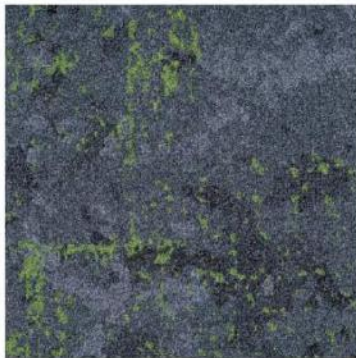


Ease



Regeneration

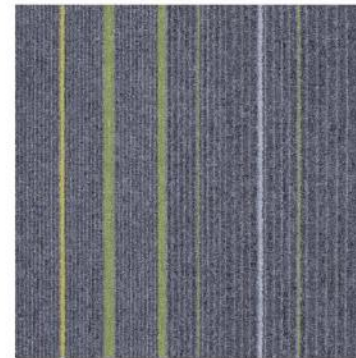


Riding


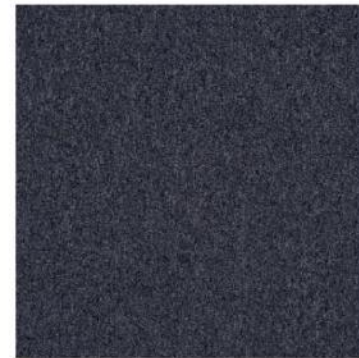


Parking

Rush Hour & Ease

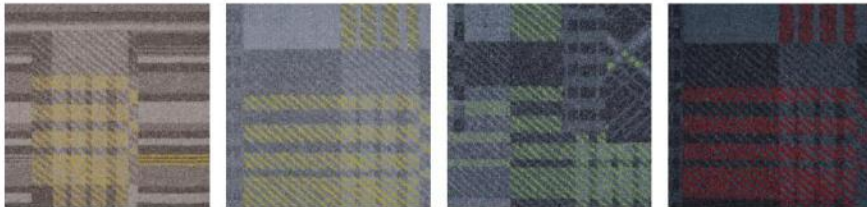

Rush Hour

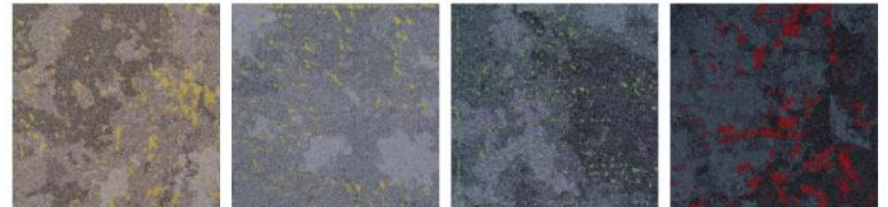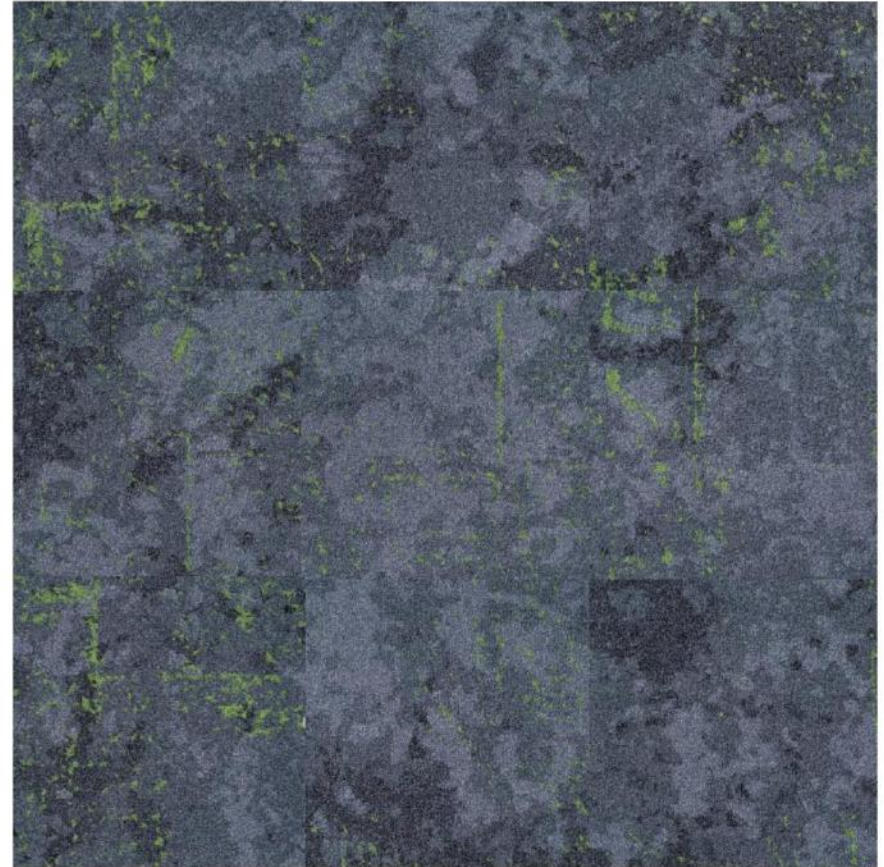

Ease

Rush Hour 01/Ease 01



Specification

| | |
|----------------------|--|
| Style Name: | Rush Hour / Ease |
| Construction: | Multi-Level Loop |
| Fiber: | ECONYL® 100% Regenerated Nylon |
| Gauge: | 1/10" |
| Stitches: | 9 per inch |
| Pile Weight: | 25 OZ/yd ² |
| Average Pile Height: | 4.5 mm ± 0.5mm |
| Backing: | PVC with Fiberglass |
| Tile size: | 50cm*50cm |
| Area of Use: | Commercial - General Duty |
| Anti-microbial: | Health Guard (Available) |
| Flammability: | ASTM E 648 Class I, GB8624-2012 B1(C) |
| Smoke Density: | ASTM E 662 Less than 450, GB/T 8627-1999 |
| Static Propensity: | AATCC-134 ≤3.5kV, GB/T 18044-2008 |



Specification



01

02

03

04



05

06

07

08



09

10

11

12



13


14

15

16

| | |
|----------------------|--|
| Style Name: | Regeneration |
| Construction: | Multi-Level Loop |
| Fiber: | ECONYL® 100% Regenerated Nylon |
| Gauge: | 1/12" |
| Stitches: | 12 per inch / 10 per inch |
| Average Pile Height: | 4mm±0.5mm |
| Backing: | PVC with Fiberglass |
| Tile size: | 50cm*50cm |
| Area of Use: | Commercial - Heavy Duty |
| Anti-microbial: | Health Guard (Available) |
| Flammability: | ASTM E 648 Class I, GB8624-2012 B1(C) |
| Smoke Density: | ASTM E 662 Less than 450, GB/T 8627-1999 |
| Static Propensity: | AATCC-134 ≤3.5kV, GB/T 18044-2008 |



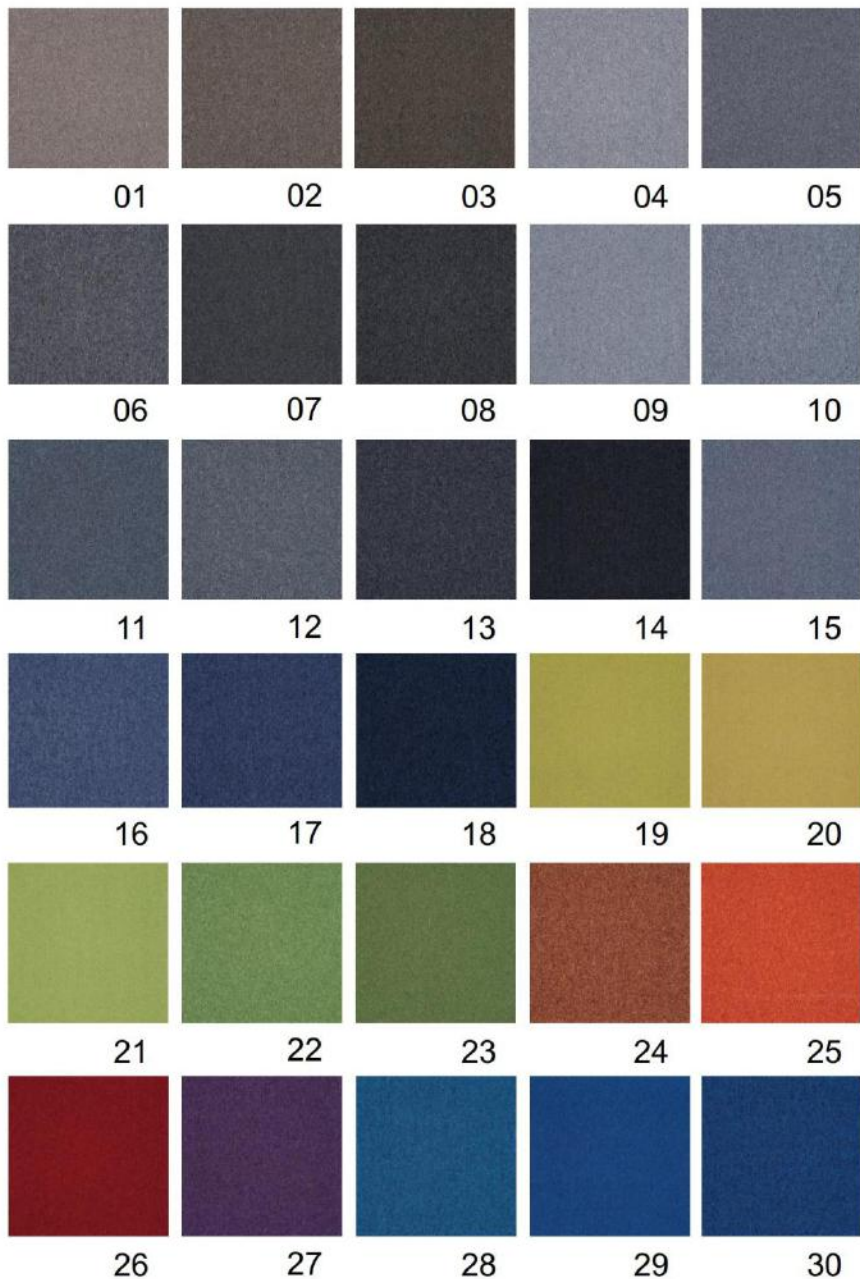


Specification

| | |
|----------------------|--|
| Style Name: | Parking |
| Construction: | Multi-Level Loop |
| Fiber: | ECONYL® 100% Regenerated Nylon |
| Gauge: | 1/12" |
| Stitches: | 12 per inch / 10 per inch |
| Average Pile Height: | 4mm±0.5mm |
| Backing: | PVC with Fiberglass |
| Tile size: | 50cm*50cm |
| Area of Use: | Commercial - Heavy Duty |
| Anti-microbial: | Health Guard (Available) |
| Flammability: | ASTM E 648 Class I, GB8624-2012 B1(C) |
| Smoke Density: | ASTM E 662 Less than 450, GB/T 8627-1999 |
| Static Propensity: | AATCC-134 ≤3.5kV, GB/T 18044-2008 |


Riding 06/**Parking** 15, 23, 28




01

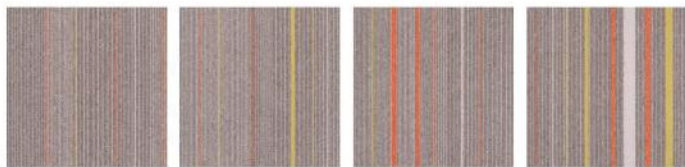

03

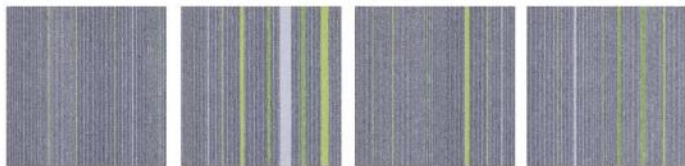

05

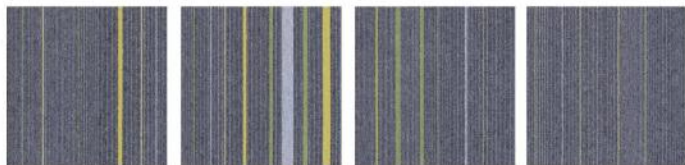

07



09



02



04



06



08



10



Specification

| | |
|----------------------|--------------------------------|
| Style Name: | Riding |
| Construction: | Multi-Level Loop |
| Fiber: | ECONYL® 100% Regenerated Nylon |
| Gauge: | 1/12" |
| Stitches: | 12 per inch / 10 per inch |
| Average Pile Height: | 4mm±0.5mm |

| | |
|--------------------|--|
| Backing: | PVC with Fiberglass |
| Tile size: | 50cm*50cm |
| Area of Use: | Commercial - Heavy Duty |
| Anti-microbial: | Health Guard (Available) |
| Flammability: | ASTM E 648 Class I, GB8624-2012 B1(C) |
| Smoke Density: | ASTM E 662 Less than 450, GB/T 8627-1999 |
| Static Propensity: | AATCC-134 ≤3.5kV, GB/T 18044-2008 |

Thank You!

